

No	Item	Specification	Company	Country	quantity	Unit Price	Total Price	Picture																																																																																																																																																
1	VD Pro 15~150km Video/Data Wireless Transmission System	<table><tr><td rowspan="3">Frequency</td><td>800MHz</td><td>√</td><td>√</td><td>√</td><td>√</td><td>√</td></tr><tr><td>1.4G</td><td>√</td><td>√</td><td>√</td><td>√</td><td>√</td></tr><tr><td>2.4G</td><td>√</td><td>x</td><td>x</td><td>x</td><td>x</td></tr><tr><td rowspan="2">Bandwidth</td><td>14MHz/3MHz</td><td>√</td><td>√</td><td>√</td><td>√</td><td>x</td></tr><tr><td>5MHz/10MHz/20MHz (configurable)</td><td>√</td><td>√</td><td>√</td><td>√</td><td>√</td></tr><tr><td>ERP</td><td></td><td>0-25dBm±2</td><td>0-33dBm±2</td><td>0-37dBm±2</td><td>0-40dBm±2</td><td>0-40dBm±2</td></tr><tr><td rowspan="3">Receiver Sensitivity</td><td>800MHz 3MHz -106dBm</td><td>√</td><td>√</td><td>√</td><td>√</td><td>√</td></tr><tr><td>1.4GHz 3MHz -106dBm</td><td>√</td><td>√</td><td>√</td><td>√</td><td>√</td></tr><tr><td>2.4GHz 3MHz -106dBm</td><td>√</td><td>x</td><td>x</td><td>x</td><td>x</td></tr><tr><td>Modulation</td><td>OFDM/QPSK/16QAM/64QAM</td><td>√</td><td>√</td><td>√</td><td>√</td><td>√</td></tr><tr><td>Bit Rate</td><td>30Mbps</td><td>√</td><td>√</td><td>√</td><td>√</td><td>√</td></tr><tr><td>Range(km)</td><td></td><td>15</td><td>30</td><td>60</td><td>150</td><td>150</td></tr><tr><td rowspan="2">Delay</td><td>Ethernet≤150ms</td><td>√</td><td>√</td><td>√</td><td>√</td><td>√</td></tr><tr><td>UART≤20ms</td><td>√</td><td>√</td><td>√</td><td>√</td><td>√</td></tr><tr><td>Boot Time(s)</td><td></td><td>≤10</td><td>≤5</td><td>≤5</td><td>≤5</td><td>≤10</td></tr><tr><td rowspan="3">Antenna</td><td>SMA *2</td><td>√</td><td>√</td><td>√</td><td>√</td><td>√</td></tr><tr><td>Tx*1</td><td>√</td><td>√</td><td>√</td><td>√</td><td>√</td></tr><tr><td>Rx*2</td><td>√</td><td>√</td><td>√</td><td>√</td><td>√</td></tr><tr><td rowspan="3">Interface</td><td>ETH*2</td><td>√</td><td>√</td><td>√</td><td>√</td><td>√</td></tr><tr><td>TTL *1</td><td>√</td><td>√</td><td>√</td><td>√</td><td>√</td></tr><tr><td>RS232 *1</td><td>√</td><td>√</td><td>√</td><td>√</td><td>√</td></tr><tr><td>Parameter Configuration</td><td>Web page</td><td>√</td><td>√</td><td>√</td><td>√</td><td>√</td></tr></table>	Frequency	800MHz	√	√	√	√	√	1.4G	√	√	√	√	√	2.4G	√	x	x	x	x	Bandwidth	14MHz/3MHz	√	√	√	√	x	5MHz/10MHz/20MHz (configurable)	√	√	√	√	√	ERP		0-25dBm±2	0-33dBm±2	0-37dBm±2	0-40dBm±2	0-40dBm±2	Receiver Sensitivity	800MHz 3MHz -106dBm	√	√	√	√	√	1.4GHz 3MHz -106dBm	√	√	√	√	√	2.4GHz 3MHz -106dBm	√	x	x	x	x	Modulation	OFDM/QPSK/16QAM/64QAM	√	√	√	√	√	Bit Rate	30Mbps	√	√	√	√	√	Range(km)		15	30	60	150	150	Delay	Ethernet≤150ms	√	√	√	√	√	UART≤20ms	√	√	√	√	√	Boot Time(s)		≤10	≤5	≤5	≤5	≤10	Antenna	SMA *2	√	√	√	√	√	Tx*1	√	√	√	√	√	Rx*2	√	√	√	√	√	Interface	ETH*2	√	√	√	√	√	TTL *1	√	√	√	√	√	RS232 *1	√	√	√	√	√	Parameter Configuration	Web page	√	√	√	√	√	"Foxtech"	China	2 PCS			
Frequency	800MHz	√		√	√	√	√																																																																																																																																																	
	1.4G	√		√	√	√	√																																																																																																																																																	
	2.4G	√	x	x	x	x																																																																																																																																																		
Bandwidth	14MHz/3MHz	√	√	√	√	x																																																																																																																																																		
	5MHz/10MHz/20MHz (configurable)	√	√	√	√	√																																																																																																																																																		
ERP		0-25dBm±2	0-33dBm±2	0-37dBm±2	0-40dBm±2	0-40dBm±2																																																																																																																																																		
Receiver Sensitivity	800MHz 3MHz -106dBm	√	√	√	√	√																																																																																																																																																		
	1.4GHz 3MHz -106dBm	√	√	√	√	√																																																																																																																																																		
	2.4GHz 3MHz -106dBm	√	x	x	x	x																																																																																																																																																		
Modulation	OFDM/QPSK/16QAM/64QAM	√	√	√	√	√																																																																																																																																																		
Bit Rate	30Mbps	√	√	√	√	√																																																																																																																																																		
Range(km)		15	30	60	150	150																																																																																																																																																		
Delay	Ethernet≤150ms	√	√	√	√	√																																																																																																																																																		
	UART≤20ms	√	√	√	√	√																																																																																																																																																		
Boot Time(s)		≤10	≤5	≤5	≤5	≤10																																																																																																																																																		
Antenna	SMA *2	√	√	√	√	√																																																																																																																																																		
	Tx*1	√	√	√	√	√																																																																																																																																																		
	Rx*2	√	√	√	√	√																																																																																																																																																		
Interface	ETH*2	√	√	√	√	√																																																																																																																																																		
	TTL *1	√	√	√	√	√																																																																																																																																																		
	RS232 *1	√	√	√	√	√																																																																																																																																																		
Parameter Configuration	Web page	√	√	√	√	√																																																																																																																																																		

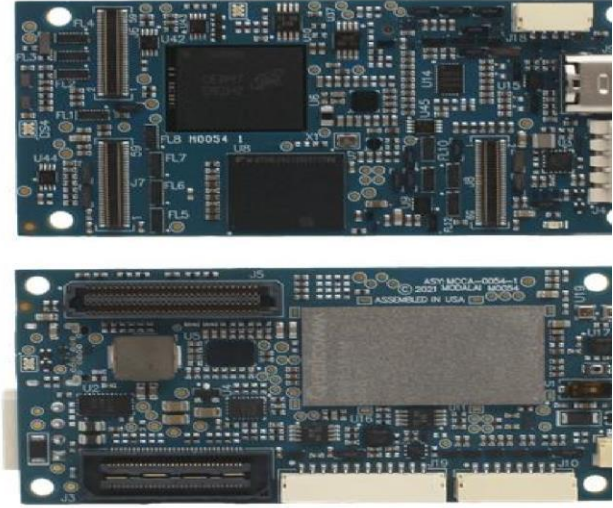
[Type here]

2	CUAV V5+ Flight Controller	8-14 PWM outputs (6 from IO, 8 from FMU) 3 dedicated PWM/Capture inputs on FMU Dedicated R/C input for CPPM Dedicated R/C input for PPM and S.Bus analog / PWM RSSI input S.Bus servo output 5 general purpose serial ports 4 * I2C ports 4 * SPI buses 2 * CANBuses with serial ESC Analog inputs for voltage / current of 2 batteries	CUAV Tech Inc., Ltd	China	30 PCS			
3	T Motor Flame ESC 60A	FLAME 60A 12S V2.0 Multi-Rotor UAVs ESC	Tiger Motor" (T-Motor)	China	20 PCS			

[Type here]

4	T Motor Flame ESC 80A	FLAME 80A 12S V2.0 MultiRotor UAVs ESC	Tiger Motor" (T-Motor)	China	20 PCS			
5	T Motor Flame ESC 100A	FLAME 100A 8S Multi-Rotor UAVs ESC	Tiger Motor" (T-Motor)	China	20 PCS			

[Type here]

6	VOXL 2 Dev Kit	16 grams, 70x36mm SWAP-optimized design Powered by Qualcomm® QRB5165: 8 cores up to 3.091 GHz, 8GB LPDDR5 15 TOPS AI embedded Neural Processing Unit (NPU) Integrated flight controller on DSP with TDK® ICM-42688 IMU and ICP-10111 Barometer 5G, 4G/LTE, WiFi, Microhard add-on connectivity	Modal AI, Inc.	USA	10 PCS			 VOXL 2 DEV. KIT
7	Image Sensor 4k High-resolution for VOXL® (10x10x16mm) (MSU-M0024)	M0024-2 146° field of view (FOV), 2.95g 10 x 10 x 16 mm	Modal AI, Inc.	USA	10 PCS			

[Type here]

8	VOXL Mipi Extension Flex	VOXL MIPI Extension Flex Cable 14.5cm	Modal AI, Inc.	USA	10 PCS			
9	GPS M9N	Ublox M9N GNSS Reciever Accurate Positioning Fast Navigation Update Rate IST8310 Compass High-gain 25*25*4mm antenna Internal Buzzer, Safety switch Ultra Bright UI RGB LED	Holybro	China	40 PCS			
10	CUAV C-RTK 9Ps Positioning Module Rover unit stand unit and base unitcombo	CUAV C-RTK 9Ps Positioning Module High Precision GPS RTK GNSS Pixhawk 1–Multi-star Multi-frequency Receiver 2–Centimeter-Level Positioning 3–Dual RTK For Yaw 4–Dual-end Switchover design reduced costs	CUAV Tech Inc.,	China	10 PCS			

[Type here]

11	Ghz Antenna dbi Parabolic	2.4GHz 24dbi wifi square grid antenna 4G 5G Antenna Grid hyperbolic Antenna Mesh Parabolic for router	"Shenzhen Qingkeyun	China	5 PCS			
12	Ghz Antenna dbi Parabolic	5.8 ghz 24dBi High frequency high quality grid parabolic antenna	"Guangzhou G-Antetech	China	5 PCS			
13	High Gain Waterproof	High Gain Waterproof Outdoor 800-2500MHZ Directional LTE 4G Log Periodic Antenna	"Shenzhen Shengda	China	5 PCS			
14	T-Pro V2 ELRS 2.4Ghz Radio Controller	T Pro V2 Internal 2.4G 1000mW ExpressLRS ELRS module Radio Controller Hall Sensor Gimbals EdgeTX/OpenTX TPRO	Jumper	China	20 PCS			

[Type here]

15	PixArt PAA3905E1 Optical Flow Sensor Tracks under low light conditions of >5 lux Effective Viewing angle up to 42° Wide working ranges from 80mm up to 30m Up to 7.4 rad/s 40mW IR LED built onto the board for improved low-light operation Broadcom AFBR-S50LV85D Time-of-Flight Distance Sensor Integrated 850 nm laser light source Field-of-View (FoV) of 12.4° x 6.2° with 32 pixels Typical distance sensing range up to 30m Operation of up to 200k Lux ambient light Works well on all surface conditions Transmitter beam of 2° x 2° to illuminate between 1 and 3 pixels	holybro	China				
----	---	---------	-------	--	--	--	---

[Type here]

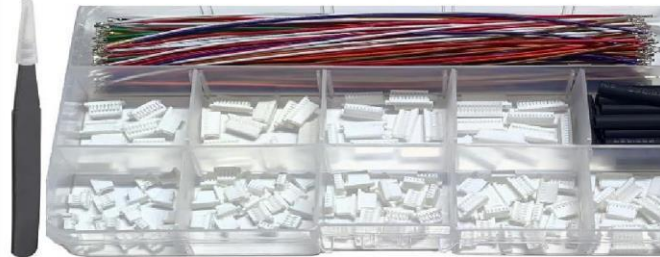
16	DroneCAN RM3100 Compass	DroneCAN RM3100 Professional Grade Compass	holybro	China	20			
17	APD PDB500[X] 12S 52V 500A Power Distribution Board	2.5mm thickness for strength and reliability 58mm x 58mm in size PCB rated for 180°C continuous S-12S input 8 Layers of 4oz copper to each ESC 12V @ 3A switching regulator 5V @ 3A switching regulator	lumenier	USA	50			

[Type here]

18	GEPRC ELRS DUAL 2.4G Diversity Receiver	Size: 20*14mm Weight: 1.2g (RX only) Chips: ESP32-PICO-D4, SX1281 Crystal Oscillator: TCXO Frequency Band: 2.4GHz ISM Refresh Rate: 25Hz-1000Hz Input Voltage: 5V Antenna Connector: ipex1 Indicator Light: RGB light TLM Power: 20dBm	GEPRC	China	50			
19	ARK Flow Open Source Optical Flow and Distance Sensor	Integrated 850 nm laser light source Field-of-View (FoV) of 12.4° x 6.2° with 32 pixels Typical distance range up to 30m Operation of up to 200k Lux ambient light Works well on all surface conditions Transmitter beam of 2° x 2° to illuminate between 1 and 3 pixels	ark electronics	USA	20			

[Type here]

--	--	--	--	--	--	--	--	--

20	JST SH 1.00mm Set 3/4/5/6/7/8/9/10/12 Pin with precrimped colored cables	JST SH 1.0mm Connector Kit 3/4/5/6/7/8/9/10/12 Pin Housing JST Adapter (Total 140pcs sh1.0 Connectors) with 28AWG Pre-Crimped Cables(150mm/5.9 inch)	JST	Japan	50 set			Packing list <table><tr><th colspan="5">Pre-crimped cable 10 colors*each 15 PCS=150PCS</th></tr><tr><th colspan="5">Tweezers*1</th></tr><tr><td>8P Connector *10 PCS</td><td>9P Connector *10 PCS</td><td>10P Connector *10 PCS</td><td>12P Connector *10 PCS</td><td>Heat Shrink Tubing Tube*</td></tr><tr><td>3P Connector *20 PCS</td><td>4P Connector *20 PCS</td><td>5P Connector *20 PCS</td><td>6P Connector *20 PCS</td><td>7P Connecto *20 PCS</td></tr></table>	Pre-crimped cable 10 colors*each 15 PCS=150PCS					Tweezers*1					8P Connector *10 PCS	9P Connector *10 PCS	10P Connector *10 PCS	12P Connector *10 PCS	Heat Shrink Tubing Tube*	3P Connector *20 PCS	4P Connector *20 PCS	5P Connector *20 PCS	6P Connector *20 PCS	7P Connecto *20 PCS
Pre-crimped cable 10 colors*each 15 PCS=150PCS																												
Tweezers*1																												
8P Connector *10 PCS	9P Connector *10 PCS	10P Connector *10 PCS	12P Connector *10 PCS	Heat Shrink Tubing Tube*																								
3P Connector *20 PCS	4P Connector *20 PCS	5P Connector *20 PCS	6P Connector *20 PCS	7P Connecto *20 PCS																								

[Type here]

21	Foxeer 5.8G Lollipop 4 2.6dBi Omni Antenna pcs - Angle SMA 150mm RHCP (Choose Color)	Center Frequency: 5.7GHz Gain: 2.6dBi Axial Ratio: Close to 1 Band Width: 5.5G~6GHz Radiation Efficiency: 98% SWR: 1.07 at Center Frequency Polarization: RHCP Case Material: PC+ABS Weight: 13.9g Connector & Length: Angle SMA 150mm *Overall Length)	Foxeer	China	50 PCS		
22	FOXEEER 4.9G- G Reaper Infinity 10W Image Transmission 80CH VTX FPV Accessories	Product Name: Death God Infinity 10W Image Transmission Input voltage 9~36V Output voltage 5V Channel 80CH Power: 1W/2.5W/5W/7.5W/10W Double click on Pit to enter Weight 48g Installation hole 20 * 20mm M2 2.5mm hole thickness Size 6 * 37 * 16mm Antenna interface specification SMA Wire interface GH1.25 6P Power consumption 10V/3.3A&20V/1.5A; 10W	Foxeer	China	30 PCS		

[Type here]

23	CUAV P9 900MHz Telemetry Set incl Battery, Antenna,	Working Frequency 902-928MHz Transmission technology Frequency Hopping Transfer Protocol Transparent transmission Output power 100mW – 1W (20-30dBm) / (Default : 1W) Serial interface 3.3V CMOS TTL Antenna gain 5dBi Baud rate UP to 230.4kbps; 57600 (Default) Link Rate 115 – 276 kbps	CUAV Tech Inc.,	China	20 PCS			
24	CUAV Skye 2 DLVR Nano Airspeed Sensor	MCU STM32F4 100MHz Sensor DLVR_L10D airspeed measurement 0226.8km/h Error 1% Protocol DroneCan Compatible controller ArduPilot/PX4 Operating Voltage 4.75-5.3V Operating temperature -20 to 85°C Shell material 15g	CUAV Tech Inc.,	China	20 PCS			

[Type here]

25	Motor AT5230A	AT5230A 30CC VTOL Fixed Wing Aircraft long shaft Motor KV200 Packaging Weight : 800g, Packaging size : 185*105*75mm• AT52 series are suitable for 90E-140E aircraft,corresponding to gasoline engine about 25-30C	Tiger Motor (T-Motor)	China	30 PCS			
26	Motor AT7215	AT7215 30CC VTOL UAV Fixed Wing Aircraft Long Shaft Motor KV200/KV245/KV270/KV220 \$219.00 Packaging Weight : 900g, Packaging size : 185*125*105mm• AT72 series are suitable for 120E-170E aircraft,corresponding to gasoline engine about 30-40CC	Tiger Motor (T-Motor)	China	5 PCS			

[Type here]

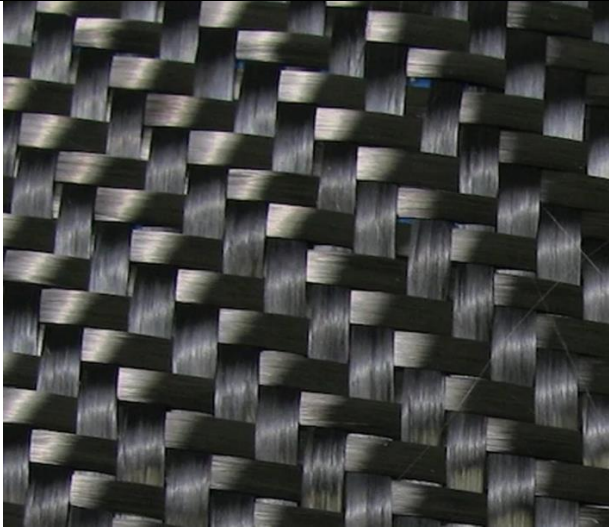
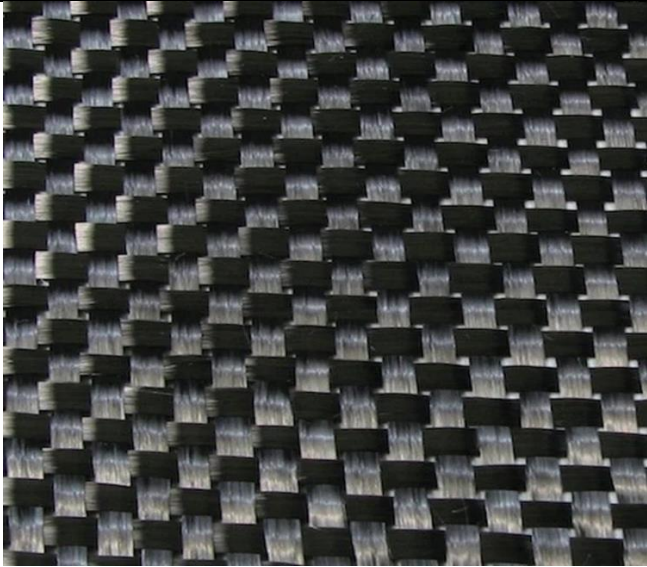
27	Motor AT8030	AT8030 85CC VTOL UAV Fixed Wing Aircraft Long Shaft MotorKV160/KV190	Tiger Motor (T-Motor)	China	5 PCS			
28	Platinum FW 5230 Motors	Platinum FW 5230 Motors	Hobbywing	China	10			
29	MKS Servo HV6160	Speed: 0.230 s (4.8V) / 0.182 s (6.0V) / 0.147 s (7.4V) / 0.133 s (8.2V) Weight: 30.7 g (1.08 oz) Dimension: 33 x 10 x 35.2 mm	MKS (MicroKinetics Servo Technology)	Taiwan	50 PCS			

[Type here]

30	MKS Servo HBL6625	Speed: 0.16 s (6.0V) / 0.127 s (7.4V) / 0.11 s (8.2V) Weight: 27.85 g (0.98 oz) Dimension : 30 x 10 x 35.5 mm	MKS (MicroKinetics Servo Technology)	Taiwan	50 PCS			
----	-------------------	--	---	--------	-----------	--	--	---

31	Spinners for Aeronaut propeller	Spinners for Aeronaut propeller with aluminum center piece CNSpinner 38mm= 20 PCS -center piece = 20 PCS CN Spinner 40mm= 20 PCS -center piece = 20 PCS CNSpinner 42mm= 20 PCS -center piece = 20 PCS CNSpinner 45mm=20 PCS -center piece = 20 PCS CNSpinner 48mm=20 PCS -center piece = 20 PCS CNSpinner 50mm= 20 PCS center piece = 20 PCS Z Spinner 40mm=20 PCS Z Spinner 48 mm= 20 PCS	Aeronaut	Germany	120+160			
----	------------------------------------	--	----------	---------	---------	--	--	--

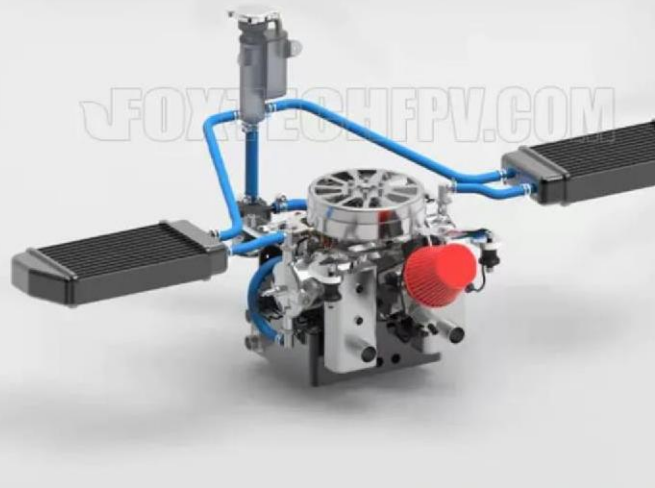
[Type here]

32	Carbon Fiber	Twill weave carbon fiber 200gr/m2 and 3K	QINGDAO HONTED BUILDING MATERIALS CO.,LTD	China	1200 M ²			
33	Carbon Fiber	1K Plain weave carbon fiber 100gr/m2	QINGDAO HONTED BUILDING MATERIALS CO.,LTD	China	500 M ²			

[Type here]

34	Epoxy Resin and Hardener	Epoxy Resin and Hardener, curing at 130 Centigrade	Dongguan Rongwei Composite Material Co., Ltd.	China	1500 Kg			
35	F6000 Electric-Petrol Hybrid Generator for 14-	Rated voltage : 14S Maximum power: 6000W Weight: 7.2 kg Fuel tank capacity: 3L / 2L Fuel consumption : 5L/H Max payload: 49KG for spraying drone, 39KG for industrial drone. Fuel ratio: 25:1 (95# gasoline, FD grade 2T oil) Working temperature: -20~45 degrees Celsius Startup mode: one-button self-starting Cooling method: forced air coolin	arrishobby	China	1 PCS			

[Type here]

36		AT5330A 25-30CC VTOL Fixed Wing Aircraft Shaft Motor KV220 Packaging Weight : 900g • Packaging size : 185*105*75mm	Tiger Motor (T-Motor)	China	10 PCS			
37	Foxtech Halo-6000 EFI Generator	Generator weight: 9.8kg Voltage: 58V Generator output: 6kw Idle Speed: 5000r/min Size: 320x290x230mm Fuel consumption: 700g/kwh Service Altitude: <3km Start Method: One key starting (PWM or CAN-BUS) Service temperature: -20 ~ 50°C	Foxtech	China	1 PCS			

[Type here]

Q

38	Hobbywing X9 Plus Motor + Prop	Motor Type: CW Max. Thrust: 27kg/Axis (53.6V, Sea Level) Recommended Takeoff Weight: 11-13kg/Axis (53.6V, Sea Level) Recommended LiPo Battery: 614S LiPo Operating Temperature: -20~50°C Waterproof Rating: IPX6 KV Rating: 100KV Stator Size: 96x20mm	Hobbywing	China	20 PCS			
----	--------------------------------	--	-----------	-------	--------	--	--	---

[Type here]

39	Hobbywing Xrotor X9 brushless motor	Max Thrust 19.2kg/Axis (46V, Sea Level) Recommended LiPo Battery 12S LiPo Recommended Takeoff Weight 7-9.5kg/Axis (46V, Sea Level) Product Weight (ESC/Motor/Prop) 1400g Waterproof Rating IPX7 Operating Temperature -20-55°C Motor Stator size 96*16mm KV Rating 110KV	Hobbywing	China	20 PCS			
40	Propeller	Propeller 10x6 Aeronaut	Aeronaut Modellbau GmbH &	Germany	80 Pair			 aero naut 10x6"

[Type here]

41	Propeller	Propeller 10x8 Aeronaut	Aeronaut Modellbau GmbH & Co. KG"	Germany	80 Pair			 aero=naüt 10x8"
42	Propeller	Propeller 11x7 Aeronaut	Aeronaut Modellbau GmbH & Co. KG"	Germany	80 Pair			 aero=naüt 11x7"
43	Propeller	Propeller 12.5x7.5 Aeronaut	Aeronaut Modellbau GmbH & Co. KG"	Germany	80 Pair			 aero=naüt 12.5x7.5"

[Type here]

44	Propeller	Propeller 12x6.5 Aeronaut	Aeronaut Modellbau GmbH & Co. KG"	Germany	80 Pair			 aero-naut 12x6.5"
45	Propeller	Propeller Aeronaut 13x10	Aeronaut Modellbau GmbH & Co. KG"	Germany	80 Pair			 aero-naut 13x10"

[Type here]

46	Propeller	Propeller 13x8 Aeronaut	Aeronaut Modellbau GmbH & Co. KG"	Germany	80 Pair	16	1280	 aero= naut 13x8"
----	-----------	-------------------------	--------------------------------------	---------	------------	----	------	---

47	Propeller	Propeller 14x8 Aeronaut	Aeronaut Modellbau GmbH & Co. KG"	Germany	80 Pair	16		 aero= naut 14x8"
----	-----------	-------------------------	--------------------------------------	---------	------------	----	--	---

[Type here]

48	Propeller	Propeller 15x8 Aeronaut	Aeronaut Modellbau GmbH & Co. KG"	Germany	80 Pair			 aero-naut 15x8
49	Propeller	Propeller P12*4 2PC /Pair	Tiger Motor (T-Motor)	China	30 Pair			
50	Propeller	Propeller NS 16*6.1 2PC/ pair	Tiger Motor (T-Motor)	China	30 Pair			

[Type here]

51	Propeller	Propeller NS14*4.8 2PC/Pair	Tiger Motor (T-Motor)	China	30 Pair			
52	Propeller	Propeller NS15*5 2PC /pair	Tiger Motor (T-Motor)	China	30 Pair			
53	Propeller	Propeller NS17*5.8 2PC/pair	Tiger Motor (T-Motor)	China	30 Pair			

[Type here]

54	Propeller	Propeller NS18*6 2PC/Pair	Tiger Motor (T-Motor)	China	30 Pair			
55	Propeller	Propeller NS20*6.2 2PC/Pair	Tiger Motor (T-Motor)	China	10 Pair			
56	Propeller	Propeller NS22.6.6 2PC/Pair	Tiger Motor (T-Motor)	China	10 Pair			

[Type here]

57		Propeller NS24*7.2 2PC/Pair	Tiger Motor (T-Motor)	China	20 Pair			
58		Propeller NS26*8.5 2PC/Pair	Tiger Motor (T-Motor)	China	20 Pair			
59		Propeller NS27*8.8 2PC/Pair	Tiger Motor (T-Motor)	China	20 Pair			

[Type here]

60		Propeller NS28*9.2 2PC/Pair	Tiger Motor (T-Motor)	China	20 Pair			
61		Propeller NS30*10 2PCs/ Pair	Tiger Motor (T-Motor)	China	20 Pair			
62		Propeller FA15.2*5 2PCS/ Pair	Tiger Motor (T-Motor)	China	40 Pair			

[Type here]

63		Propeller FA16.2*5.3 2PCS/Pair	Tiger Motor (T-Motor)	China	40 Pair			
64		Propeller 1045 Carbon 2PCS	Foxtech	China	100 Pair			
65		Propeller MF1302 2PC	Tiger Motor (T-Motor)	China	30 Pair			

[Type here]

66		Propeller MF1503 2PCS	Tiger Motor (T-Motor)	China	30 Pair			
67		Propeller MF2815 2PCS	Tiger Motor (T-Motor)	China	20 Pair			

[Type here]

68		Propeller MF3016 2PCS	Tiger Motor (T-Motor)	China	20 Pair		2440	
69		Propeller MF2614 2PCS	Tiger Motor (T-Motor)	China	20 Pair			
70		Propeller MF2412 2PCS	Tiger Motor (T-Motor)	China	20 Pair			

[Type here]

71	Propeller	Propeller MF3424P 2PCS	Tiger Motor (T-Motor)	China	20 Pair			
72	Propeller	Propeller MF3628P 2PCS	Tiger Motor (T-Motor)	China	20 Pair			

[Type here]

73	DLE30cc Gasoline Engine / Petrol Engines	Displacement : 30.5cm³ Diameter × Stroke : 36mm×30mm Compression Ratio : 7.6 : 1 Lubrication Ratio : 30:1 Weight of Main Engine : 920g Weight of Exhaust : 60g Weight of Ignition : 130g Ignition voltage : 4.8V-8.4V	Mile Hao Xiang Technology DLE) (Co.,Ltd.	China	1 PCS			
----	--	---	--	-------	----------	--	--	---

[Type here]

74	DLE40cc Gasoline Engine / Petrol Engines	Displacement : 40cm³ Diameter × 32 Stroke mm×25mm Compression Ratio : 10.5 : 1 Lubrication Ratio : 30:1 Weight of Main Engine : 1170g Weight of Exhaust : 110g Weight of Ignition : 170g Ignition voltage : 4.8V-8.4V	Mile Hao Xiang Technology DLE) (Co,Ltd.	China	1 PCS			
75	DLE60cc Gasoline Engine / Petrol Engines	Displacement : 61cm³ Diameter × Stroke : 36mm×30mm Compression Ratio : 7.6 : 1 Lubrication Ratio : 30:1 Weight of Main Engine : 1560g Weight of Exhaust: 200g Weight of Ignition: 190g Ignition voltage : 4.8V-8.4V	Mile Hao Xiang Technology DLE) (Co,Ltd.	China	PCS 1			

[Type here]

77	DLE120cc Gasoline Engine / Petrol Engines	Displacement : 120cm³ Diameter × Stroke : 47mm×35mm Compression Ratio : 10.5 : 1 Lubrication Ratio : 30:1 Weight of Main Engine : 2400g Weight of Exhaust : 300g Weight of Ignition : 190g Ignition voltage : 4.8V-8.4V	Mile Hao Xiang Technology DLE) (Co.,Ltd.	China	1 PCS			
78	DLE130cc Gasoline Engine / Petrol Engines	Displacement : 130cm ³ Diameter × Stroke : 47mm×37.5 Compression Ratio : 9.2 : 1 Lubrication Ratio : 30:1 Weight of Main Engine : 2500g Weight of Exhaust : 350g Weight of Ignition : 190g Ignition voltage : 4.8V-12V	m Mile Hao Xiang Technology DLE) (Co.,Ltd.	China	1 PCS			

[Type here]

79	DLE170cc Gasoline Engine / Petrol Engines	Displacement : 170cm ³ Diameter × Stroke : 52mm×40mm Compression Ratio : 9.5 : 1 Lubrication Ratio : 30:1 Weight of Main Engine : 3620g Weight of Exhaust : 470g Weight of Ignition : 190g Ignition voltage : 4.8V-8.4V	Mile Hao Xiang Technology DLE) Co.,Ltd. (	China	4 PCS			
	DLE222cc Gasoline Engine / Petrol Engines	Displacement : 222.5cm ³ Diameter × Stroke : 45mm×35mm Compression Ratio : 7.6 : 1 Lubrication Ratio : 30:1 Weight of Main Engine : 4860g Weight of Exhaust : 470g Weight of Ignition : 380g Ignition voltage : 4.8V-8.4V	Mile Hao Xiang Technology DLE) Co.,Ltd. (	China			00	

[Type here]

81	Standard Wooden Propeller/ Beech Propeller 16x6 for RC Gasoline/ Petrol Airplane	Aperture: 8mm Height of prop bottom: 18mm Weight: 55g Recommended engine type: 20CC	"Hobby-China Co., Ltd"	China	2 PCS			
82	Standard Wooden Propeller/ Beech Propeller 17x8 for RC Gasoline/ Petrol Airplane	Aperture: 8mm Height of prop bottom: 18mm Weight: 65g (17*8) Recommended engine type: 20CC	"Hobby-China Co., Ltd"	China	2 PCS			
83	Standard Wooden Propeller 18x8 for RC Gasoline/ Petrol	Aperture: 10mm (18*8) Height of prop bottom: 20mm Weight: 83g (18*8), Recommended engine type: 30CC (for 18*8)	"Hobby-China Co., Ltd"	China	2 PCS			

[Type here]

84	Standard Wooden Propeller/ Beech Propeller 19*8 for RC	Aperture: 10mm Height of prop bottom: 21mm Weight: 94g (19*8) Recommended engine type: 30CC	"Hobby-China Co., Ltd"	China	2 PCS			
85	Standard Wooden Propeller 20*10	Aperture: 10mm Height of prop bottom: 22mm Weight: 102g (20*10) Recommended engine type: 35CC	"Hobby-China Co., Ltd"	China	2 PCS			
86	Standard Wooden Propeller/ Beech Propeller 21*8 for RC Gasoline/ Petrol Airplane	Aperture: 10mm Height of prop bottom: 21mm Weight: 116g (21*8) Recommended engine type: 30-35CC	"Hobby-China Co., Ltd"	China	2 PCS			
87	Standard Wooden Propeller/ Beech Propeller 22*10 for RC Gasoline/ Petrol Airplane	Aperture: 10mm Height of prop bottom: 23mm Weight: 120g (22*10) Recommended engine type: 55CC	"Hobby-China Co., Ltd"	China	2 PCS			
88	Standard Wooden Propeller/ Beech Propeller 23*10 for RC Gasoline/ Petrol Airplane	Aperture: 10mm Height of prop bottom: 24mm Weight: 145g (23*10) Recommended engine type: 55CC	"Hobby-China Co., Ltd"	China	2 PCS			

[Type here]

98	2 x10in Standard Wooden Propeller 24*10in/ Beech Propeller 24x10 for RC	Aperture: 10mm Height of prop bottom: 25mm Weight: 133g Recommended engine type: 80-100CC	"Hobby-China Co., Ltd"	China	2 PCS			
90	2 x8in Standard Wooden Propeller 25*8in/ Beech Propeller 25x8 for RC Gasoline/ Petrol Airplane	Aperture: 10mm Height of prop bottom: 25mm Weight: 165g Recommended engine type: 80-100CC	"Hobby-China Co., Ltd"	China	2 PCS			
91	2 x10in Standard Wooden Propeller 26*10in/ Beech Propeller 26x10 for RC Gasoline/	Aperture: 10mm Height of prop bottom: 25mm Weight: 177g Recommended engine type: 80-100CC	"Hobby-China Co., Ltd"	China	2 PCS			
92	Standard Wooden Propeller/ Beech Propeller 27x10 for RC Gasoline Drilled	Aperture: 10mm Height of prop bottom: 26mm Weight: 185g Recommended engine type: 110CC	"Hobby-China Co., Ltd"	China	2 PCS			

[Type here]

93	Standard Wooden Propeller 28*10 for RC Beech Propeller	Aperture: 10mm Height of prop bottom: 33mm Weight: 243g Recommended engine type: 110CC	"Hobby-China Co., Ltd"	China	2 PCS			
94	Standard Wooden Propeller/ Beech Propeller 30*10 for RC	Aperture: 10mm Height of prop bottom: 30.6mm Recommended engine type: 170CC	"Hobby-China Co., Ltd"	China	2 PCS			
95	for RC Gasoline/ Petro Standard Wooden Propeller/ Beech Propeller Airplane	Aperture: 10mm Height of prop bottom: 31m Recommended engine type: 170CC	"Hobby-China Co., Ltd"	China	2 PCS			
96	Standard Wooden Propeller/ Beech Propeller 34*10 34x10 for RC Gasoline/ Petro Airplane	Aperture: 10mm Height of prop bottom: 31.5mm Recommended engine type: 220CC	"Hobby-China Co., Ltd"	China	2 PCS			

[Type here]

97	DLE Engine Spark Plugs	For DLE 30cc = 50 For DLE 40cc = 50 For DLE 60cc = 50 For DLE 120cc = 50 For DLE 130cc = 50 For DLE 170cc = 50 For DLE 222cc = 50	DLE	China	350			
98	Olymtech 30HP 4in1 Air compressor, air tank, air dryer, air filter	4 in 1 screw air compressor, 1Stop compressor system. it contains the screw air compressor+air tank+air dryer+air filters	Olymtech Technology Development Co., Ltd	China	1			

[Type here]

99	Yamaha Feeder	Yamaha ZS 4mm Feeder KLJ-MCN00-000=40PCS Yamaha ZS 8mm Feeder KLJ-MC100000=40 PCS Yamaha ZS 12/16mm Feeder KLJ-MC200-000 KLJ-MC300-000=40PCS Yamaha ZS 24mm Feeder KLJ-MC400-000=40PCS Yamaha ZS 32mm Feeder KLJ-MC500000 = 30PCS Yamaha ZS 44mm Feeder KLJ-MC600-000=10PCS Yamaha ZS 56mm Feeder KLJ-MC700-000=5PCS Yamaha ZS 72mm Feeder KLJ-MC800-000=3PCS Yamaha ZS 88mm Feeder KLJ-MC900-000=3PCS Yamaha ZS 104mm Feeder KLJ-MCN00-000=3PCS	Yamaha Motor Corporation	Japan	62 PCS			
----	---------------	--	--------------------------	-------	--------	--	--	---

[Type here]

100	Laptop CM5I Creator 16 AI Studio Laptop: Intel Ultra 9-16GB DDR5, 1TB NVMe SSD, MicroSD Card Reader, Win 11 Pro: Lunar Gray A1VHG072US H, 16" UHD+ MiniLED Display, NVIDIA RTX 4080	Standing screen display size 16 Inches Screen Resolution 3840 x 2400 pixels Max Screen Resolution 3840x2400 Processor 3.8 GHz Intel_Mobile_CPU RAM 64 GB DDR5 Memory Speed 5600 GHz Hard Drive 1 TB SSD Graphics Coprocessor NVIDIA GeForce RTX 4080 Chipset Brand NVIDIA Card Description RTX 4080 Graphics Card Ram Size 12 GB Wireless Type Bluetooth, 802.11ax Number of USB 3.0 Ports 3 Brand MSI Series Creator 16 AI Studio A1VHG072US	MSI	Taiwan	1 PCS			 
-----	---	--	-----	--------	----------	--	--	--

101	SanDisk External Solid State Drive	SanDisk 4TB Extreme Portable SSD - Up to 1050MB/s, USB-C, USB 3.2 Gen 2, IP65 Water and Dust Resistance, Updated Firmware - External Solid State Drive	SanDisk	USA	2			
102	D Printer	Creality K1 MAX 3D Printer	Creality	China	1 PCS			

[Type here]

103	D Printer PLA Filament	\PLA Filament 1 kg Roll for K1 MAX 3D Printer	Creality	China	10 Roll			
104	% 100 E-Fiberglass	Weight 100g/1m² Width 1.5m Weave Type Plain Woven Yarn Type E-glass Type Fiberglass Industrial Cloth Material 100% Fiberglass Roll Length 100m, Colors White	Taizhou Zhongsheng Glass Fiber Products Co., Ltd	China	500 M ²			

[Type here]

105	EpoxAcoat GREY	Mix Ratio By Volume	5A:1B	Smooth-On, Inc	USA	50Kg				
		Mix Ratio By Weight	100A:15B							
		Specific Gravity	1.43 g/cc							
		Specific Volume	19.4 cu. in./l							
		Pot Life	20 minutes							
		Thin Film Working Time	40 minutes							
		Thin Film Recoat Time	60 minutes							
		Tack Free Time	4 hours							
		Cure Time	16 hours							
		Shore Hardness	85 D							
		Barcol 935 Hardness	87							

[Type here]